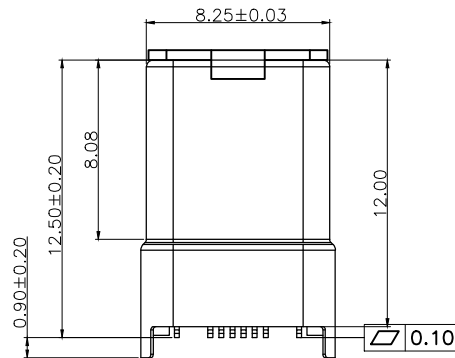
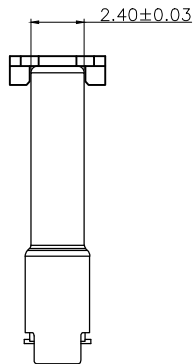



TABLE2:
PINS DESCRIPTION,ONLY USED FOR 3.1 SERIES.

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND			VBUS	SBU1	D-	D+	CC	VBUS			GND
GND			VBUS	Vconn			SBU2	VBUS			GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12




REV
A

DESCRIPTION
新版发行

DATE
2020. 11. 06

APPROVED
HHM

- NOTES:
- 1.Material:SEE TABLE1;
 - 2.Plating specification,
2-1.Contact:
Contact area: Ni30u"Min/Au
Solder area: Ni30u"Min/Sn80u"Min.
Other area: Ni 30u"Min.
2-2.Shell:Ni 50u"Min..
2-3.Latch:
Solder area: Ni30u"Min/Sn80u"Min.
Other area: Ni 30u"Min.
 - 3.Mechanicl Performance ,
3-1.Insertion Force:5~20N;
3-2.Extraction Force:6~20N after 10000 cycles;
3-3.Durability:10000 cycles.
 - 4.Electrical Performance,
4-1.Insulation Resistance:100? Min.
4-2.Contact Resistance :50m? Max.
4-3.Dielectric Strength :100V AC.
5.characteristic impedance:100 Ohm±10%;
 - 6.Marke" is the important control dimintions.
 - 7.The product accords with HF STD.
 - 8.Operating temperature:-40°C~85°C.

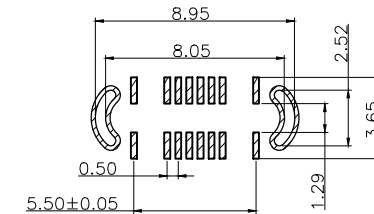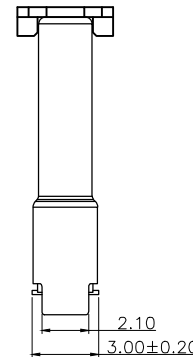

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm



TABLE1:

5	EMC SPRING	Stainless Steel;SUS301,T=0.08mm;
4	CONTACT	Copper Alloy;AuNiSn;
3	LATCH	Stainless Steel;SUS301,T=0.40mm;
2	HOUSING	LCP Thermoplastic,UL94V-0;
1	SHELL	Stainless Steel;SUS316L,T=0.15mm;
NO.	NAME	DESCRIPTION


CUSTOMER DRAWING			铭创科技（东莞）有限公司 Mingchuang Technology (Dongguan) Co., Ltd.		
UNITS mm	SCALE 1:1	SHEET 1 OF 2	TITLE TYPE C 公头16PIN 立式两脚插板SMT L=12.5		
PROJECTION: 		DRAW: DAP	MAT'L SEE TABLE		
GENERAL TOLERANCE 0. ±0.35 0.0 ±0.25 0.00 ±0.15 0.° ±4° 0.0° ±3°		CHECK: HWT	FINISH SEE TABLE		
		APPD: HHM	DWG. NO. C18M1611A	PART NO. _____	SIZE A4




REV	DESCRIPTION	DATE	APPROVED
A	新版发行	2020. 11. 06	HHM

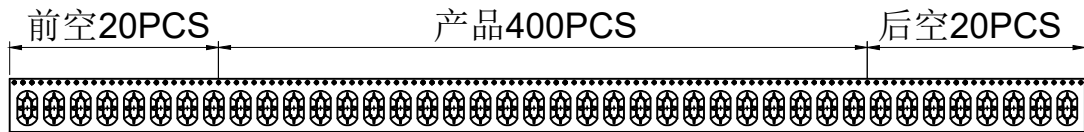


① 产品入载带示意图

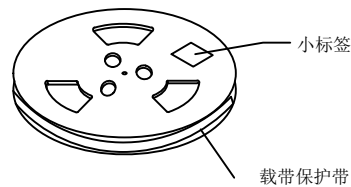


② 卷盘贴标签示意图



③ 10盘产品叠层示意图

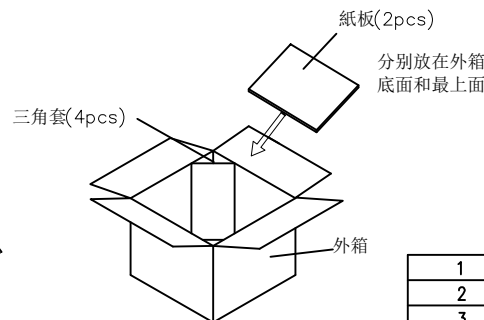

④ 产品入外箱示意图

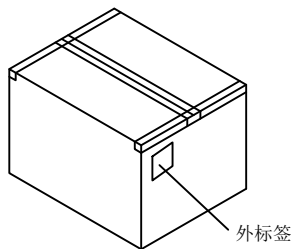

⑤ 外箱封箱示意图

1	卷盘	PS	ø330MM*W28.5MM	10
2	天地板	K3K		2
3	外标签			1
4	三角柱	K=K		4
5	外箱	A=A	L345mm*W345mm*315mm	1
6	防水袋	PS		1
7	干燥剂			1
ITEM	DESC.	MATERIAL	REMARKS	QTY

NOTE:

1. QUANTITY/REEL: 400 PCS
数量/卷: 400 PCS
QUANTITY/INNER CARTON: 400 X 10 = 4000 PCS
数量/箱: 400 X 10 = 4000 PCS
2. FREE 20 CAVE IN THE FRONT CARRIER ADN FREE 20 CAVE IN THE END CARRIER.
包装带内圈空20格, 外圈空20格.

CUSTOMER DRAWING			铭创科技（东莞）有限公司 Mingchuang Technology (Dongguan) Co., Ltd.		
UNITS mm	SCALE 1:1	SHEET 1 OF 2	TITLE TYPE C 公头16PIN 立式两脚插板SMT L=12.5		
PROJECTION: 		DRAW: DAP	MAT'L SEE TABLE		
GENERAL TOLERANCE 0. ±0.35 0.0 ±0.25 0.00 ±0.15 0.° ±4° 0.0° ±3°		CHECK: HWT	FINISH SEE TABLE		
		APPD: HHM	DWG. NO. C18M1611A	PART NO. _____	SIZE A4