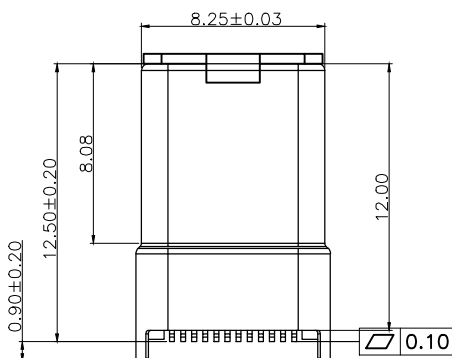
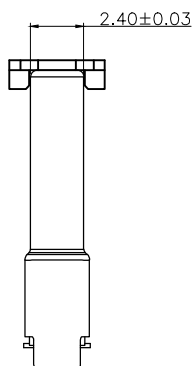



TABLE2:
PINS DESCRIPTION,ONLY USED FOR 3.1 SERIES.

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND	RX2+	RX2-	VBUS	SBU1	D-	D+	CC	VBUS	TX1-	TX1+	GND
GND	TX2+	TX2-	VBUS	Vconn			SBU2	VBUS	RX1-	RX1+	GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

REV	DESCRIPTION	DATE	APPROVED
A	新版发行	2020. 11. 06	HHM

- NOTES:
- 1.Material:SEE TABLE1;
 - 2.Plating specification,
2-1.Contact:
Contact area: Ni30u"Min/Au
Solder area: Ni30u"Min/Sn80u"Min.
Other area: Ni 30u"Min.
2-2.Shell:Ni 50u"Min..
2-3.Latch:
Solder area: Ni30u"Min/Sn80u"Min.
Other area: Ni 30u"Min.
 - 3.Mechanicl Performance ,
3-1.Insertion Force:5~20N;
3-2.Extraction Force:6~20N after 10000 cycles;
3-3.Durability:10000 cycles.
 - 4.Electrical Performance,
4-1.Insulation Resistance:100? Min.
4-2.Contact Resistance :50m? Max.
4-3.Dielectric Strength :100V AC.
5.characteristic impedance:100 Ohm±10%;
 - 6.Marke" is the important control dimentions.
 - 7.The product accords with HF STD.
 - 8.Operating temperature:-40°C~85°C.



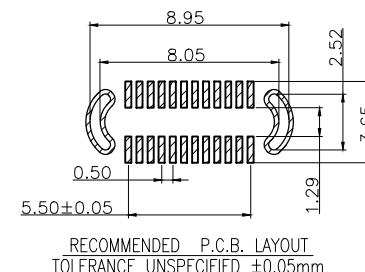



TABLE1:

5	EMC SPRING	Stainless Steel;SUS301,T=0.08mm;
4	CONTACT	Copper Alloy;AuNiSn;
3	LATCH	Stainless Steel;SUS301,T=0.40mm;
2	HOUSING	LCP Thermoplastic,UL94V-0;
1	SHELL	Stainless Steel;SUS316L,T=0.15mm;
NO.	NAME	DESCRIPTION


CUSTOMER DRAWING			铭创科技（东莞）有限公司		
UNITS mm	SCALE 1:1	SHEET 1 OF 2	Mingchuang Technology (Dongguan) Co., Ltd.		
PROJECTION: 		DRAW: DAP	TITLE TYPE C 公头24PIN 立式两脚插板SMT L=12.5		
GENERAL TOLERANCE 0. ±0.35 0.0 ±0.25 0.00 ±0.15 0.° ±4° 0.0° ±3°		CHECK: HWT	MAT'L SEE TABLE		FINISH SEE TABLE
		APPD: HHM	DWG. NO. C18M2411A	PART NO. _____	SIZE A4

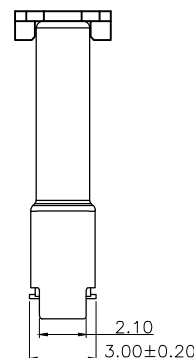


REV	DESCRIPTION	DATE	APPROVED
A	新版发行	2020. 11. 06	HHM




① 产品入载带示意图

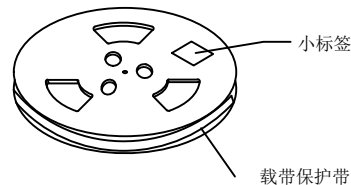


② 卷盘贴标签示意图



③ 10盘产品叠层示意图

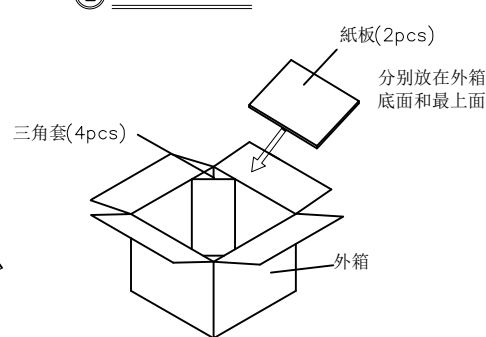

④ 产品入外箱示意图



⑤ 外箱封箱示意图

1	卷盘	PS	ø330MM*W28.5MM	10
2	天地板	K3K		2
3	外标签			1
4	三角柱	K=K		4
5	外箱	A=A	L345mm*W345mm*315mm	1
6	防水袋	PS		1
7	干燥剂			1
ITEM	DESC.	MATERIAL	REMARKS	QTY

CUSTOMER DRAWING			铭创科技（东莞）有限公司		
UNITS mm		SCALE 1:1	Mingchuang Technology (Dongguan) Co., Ltd.		
PROJECTION: 		SHEET 1 OF 2	TITLE TYPE C 公头24PIN 立式两脚插板SMT L=12.5		
GENERAL TOLERANCE 0. ±0.35 0.0 ±0.25 0.00 ±0.15 0.° ±4° 0.0° ±3°		CHECK: HWT	MAT'L SEE TABLE		FINISH SEE TABLE
		APPD: HHM	DWG. NO. C18M2411A	PART NO. _____	SIZE A4

NOTE:

1. QUANTITY/REEL: 400 PCS
数量/卷: 400 PCS
QUANTITY/INNER CARTON: 400 X 10 = 4000 PCS
数量/箱: 400 X 10 = 4000 PCS
2. FREE 20 CAVE IN THE FRONT CARRIER AND FREE 20 CAVE IN THE END CARRIER.
包装带内圈空20格, 外圈空20格。